



## Hotwheels™ Pinball GI Epic 3 Wiring update

With the new software update set to release on the week of the 6/29/2020 the location of the wire that drives GI EPIC 3 on the right side of the playfield needs to be replaced as per the instructions below.

- 1) After turning off the Mains power to the pinball machine Open the playfield glass and place it on a secure area.
- 2) Lift the playfield up and locate the PCB0047 and PCB0046 as per the below picture.

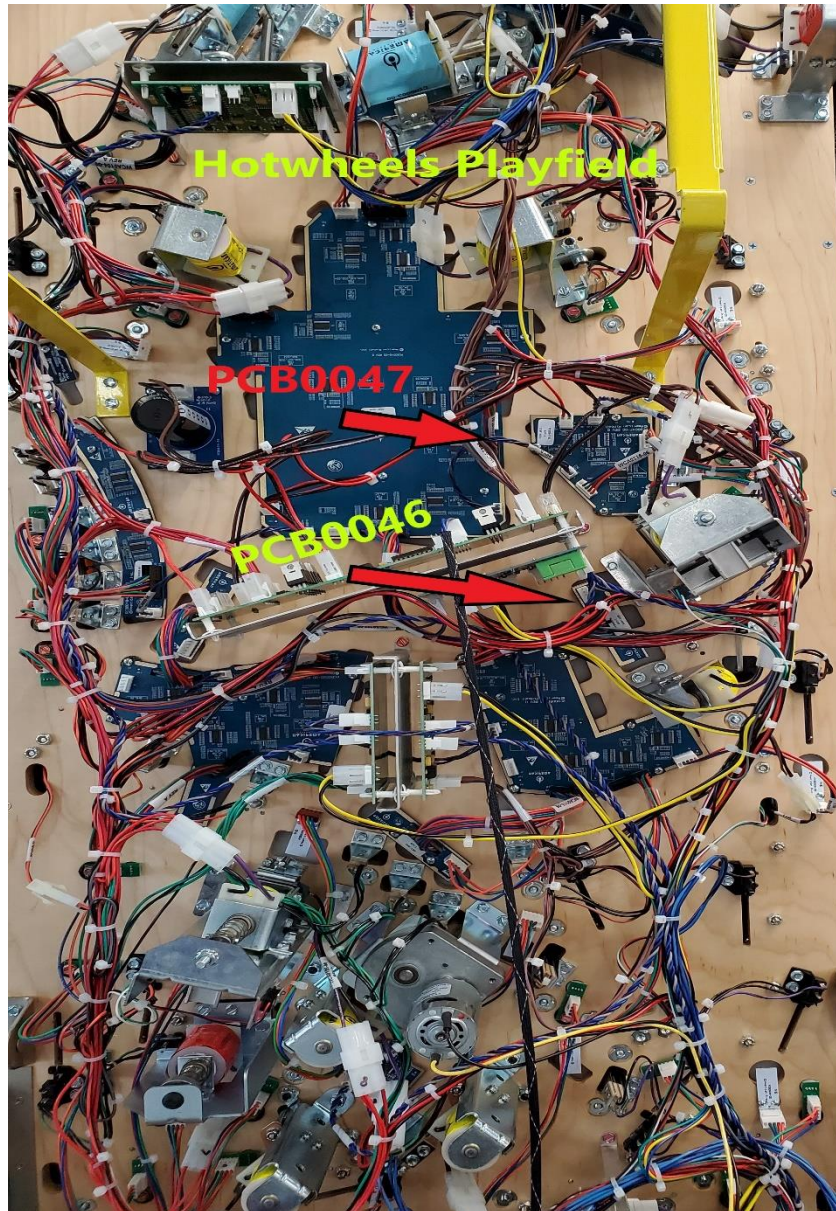


Figure 1: Hotwheels Playfield Bottom



- 3) Take off the connector from the old position on PCB0047 on connector J5 as shown in the picture and replace it to the PCB0046 connector J2.

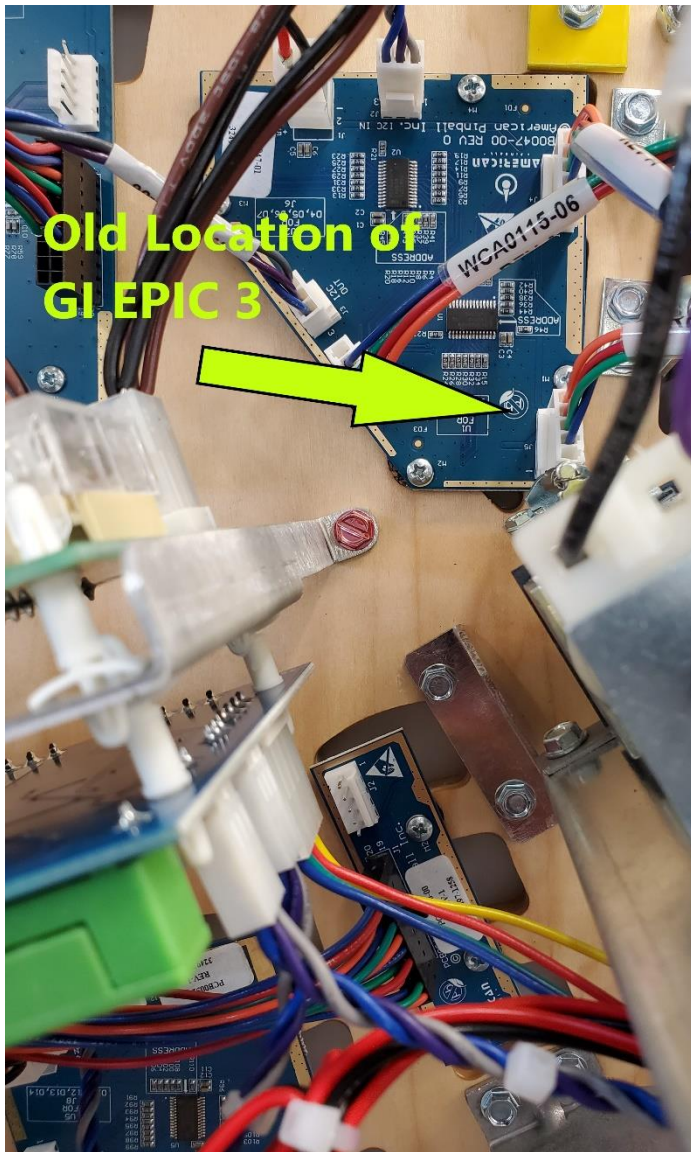


Figure 3: Old location of the connection

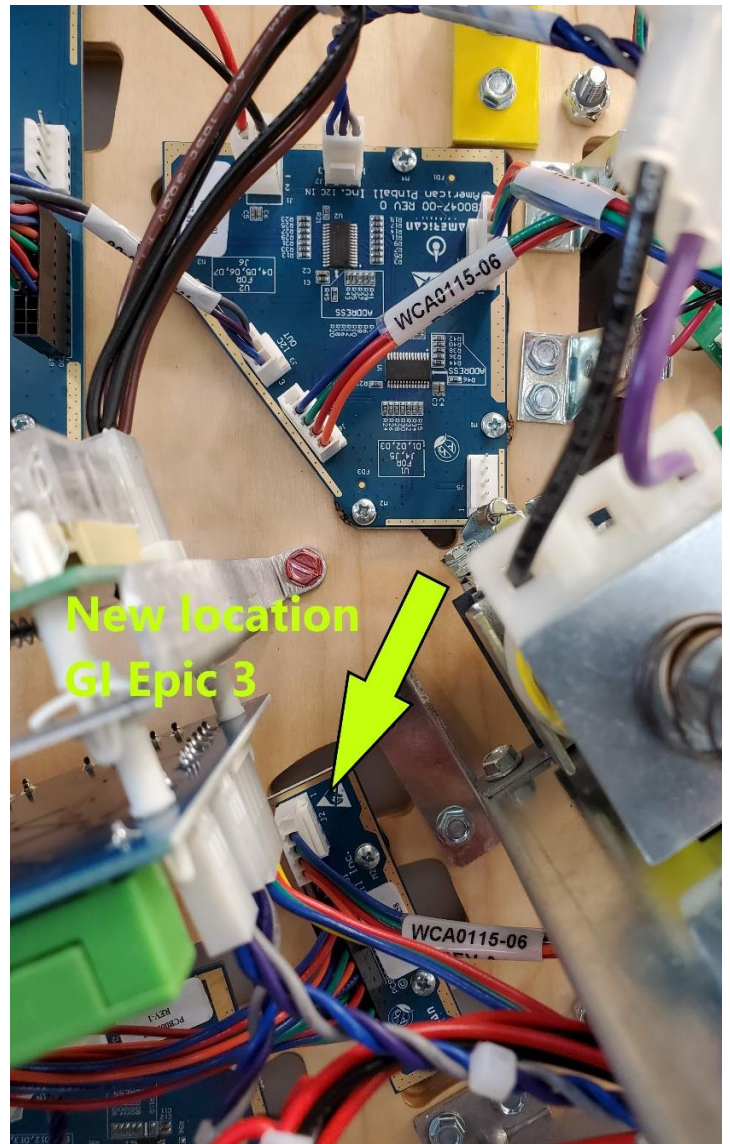


Figure 2: New connection location

- 4) During this process of wiring change if the drop target assembly is in the way and if there is not enough room to pull the connection off then you can loosen up the assembly using  $\frac{1}{4}$ " nut driver and it will give enough room to disconnect the wires.

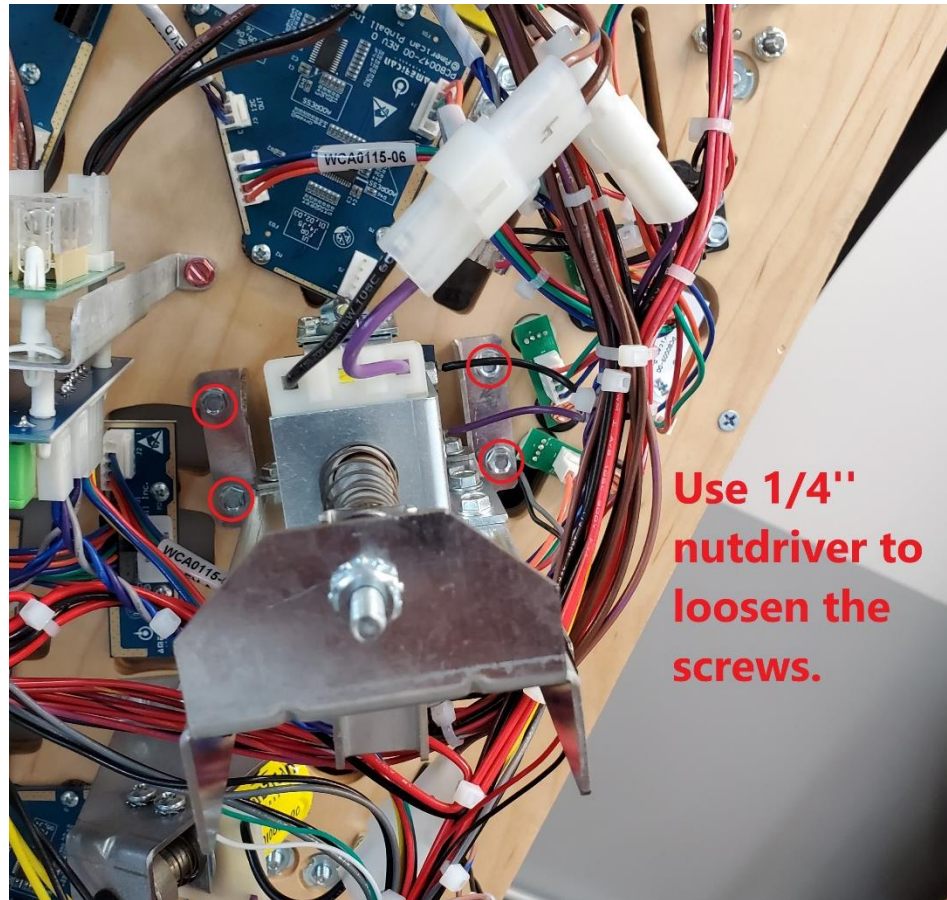


Figure 4: Assembly screw locations

\*\*\* We recommend only trained arcade machine service technicians to perform any type of repairing or servicing on our pinball machines. \*\*\*