


12v DC Dollar Bill Acceptor

For Oktoberfest, Hot wheels. Plus Houdini built 2021 and up.

Note: you can make a 120v bill acceptor work by getting an MEI 01-12-139 converter plug and tapping into a coin switch.



Wire Color	Pin Location
Black wire w/ white stripe = 12v DC HOT (power)	Pin 5
Pink wire w/ red stripe = Credit Relay Pulse/N.O.	Pin 7
Black wire = Credit Relay (Common)	Pin 8
White wire w/ black stripe = 12v DC Return (Ground)	Pin 9

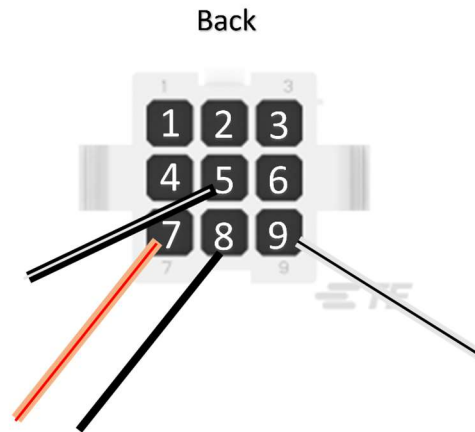

Coin door receptacle

Male 0.062" Molex pins = 02-06-2103

Receptacle = 172161-1 Mate-N-Loc

DBA Mating plug

Female 0.062" Molex pins = 02-06-1103

Plug = 172169-1 Mate-N-Lock

120v AC Dollar Bill Acceptor

Houdini's built before 2021 use 120v AC for power, configuration. If built 2021 and up, see 12v connector.

Wire Color	Pin Location
Black wire w/ white stripe = 120v AC HOT	Pin 4
Pink wire w/ red stripe = Credit Relay Pulse/N.O.	Pin 7
Black wire = Credit Relay (Common)	Pin 8
White wire w/ black stripe = 120v AC Return (Neutral)	Pin 6

Coin door receptacle

Male 0.062" Molex pins = 02-06-2103



Receptacle = 172161-1 Mate-N-Loc

DBA Mating plug

Female 0.062" Molex pins = 02-06-1103



Plug = 172169-1 Mate-N-Lock

