



Watch the Video

### Procedure:

#### Tools required:

- Screw driver
- 5/16" nut driver

1. With the game powered off, remove the playfield glass, lift the playfield and rest it vertical on the backbox.
2. Position the shaker motor on the pre-drilled holes just beyond the coin box.
3. Screw down the motor using the provided 5/16" bolts.
4. Put the plastic cover over the shaker motor and screw down with the provided screws.
5. Look in the very back of the cabinet wiring harness for a plug mate, marked SM. Plug in so it snaps in place and the black and yellow wires match up.
5. Lower the playfield and power the game ON.
6. Go into the service menu - Settings - Standard - Scroll down to Shaker Motor and select intensity desired
7. To Test: go into TEST - Coils - Shaker Motor - Rapidly hit test button
8. Back out of the service menu and enjoy.

Step 1



Step 2




Step 3



Step 4



Step 5

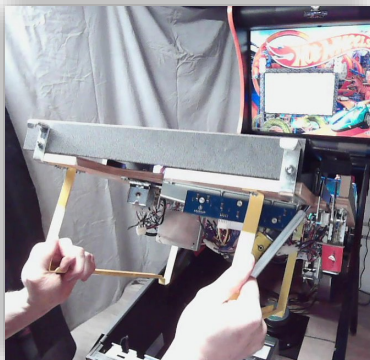

Step 6



Step 7

